


# 2 1/2" Pitch Hinged Steel Belt Conveyor

## Model 2500N

### SPECIFICATIONS

|                           |   |
|---------------------------|---|
| <b>Belt:</b>              | 2 1/2" Pitch Low-Profile belting with welded wing design  |
| <b>Belt Widths:</b>       | 6", 12", 18", 24", 30" & 36" – other widths available upon request  |
| <b>Frame:</b>             | 6 5/8" height at tail, 4 1/2" height on the horizontal  |
| <b>Belt Speeds:</b>       | 5, 10, 20, 30, 40 FPM (Feet Per Minute) – other speeds available upon request   |
| <b>Drive HP:</b>          | 1/4 through 2 hp  |
| <b>Drive Styles:</b>      | Top, bottom, side, and shaft mounted drive packages   |
| <b>Curves:</b>            | 20°, 25°, 30°, 35°, 40°, 45°, or 60°  |
| <b>Optional Features:</b> | Infeed Guides<br>Side Skirts<br>Hoppers<br>Discharge Chutes<br>Top Covers<br>Leg Supports<br>Casters<br>Electrical Controls<br>Cleats<br>Chain Oiler<br>Coolant Tanks<br>Liquid Tight Construction<br>Oilers<br>Belt Brushes<br>Drop Chutes |

### Typical Cross Section

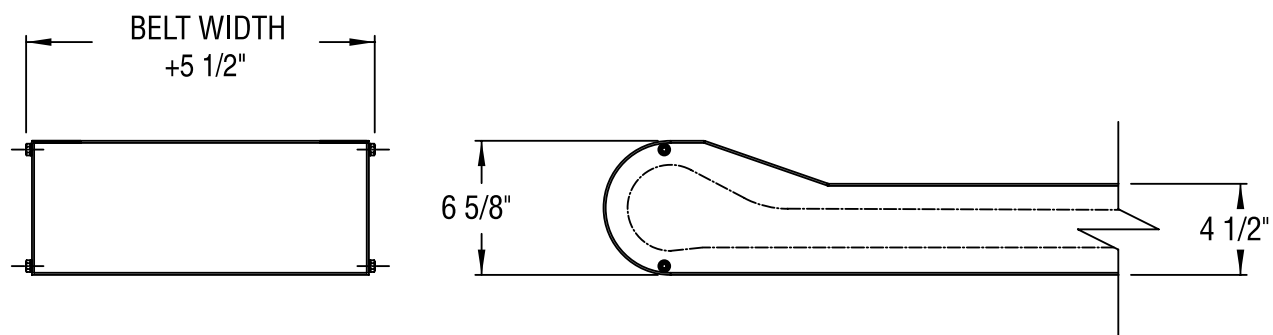

### SLIMLINE FRAME (LOW-PROFILE NECK-DOWN)

*This drawing is for dimensional reference only.  
It may not accurately depict the final conveyor design.*

