


Plastic Belt Conveyor Model 200

SPECIFICATIONS

Effective Widths:	12" to 48" in 2" increments
Live Loads:	Up to 1800 lbs.
Frame:	Formed 10 ga.
Lengths:	5 ft. to 60 ft.
Drives:	1/2 HP, 3/4 HP, 1 HP, 1-1/2 HP, 2 HP, 3 HP and 5 HP
Speeds:	30, 40, 50, 60, 75 and 100 FPM
Belt Types:	400 Series: Flat Top, Flush Grid, Open Hinge 800 Series: Flat Top, Flush Grid, Perforated Flat Top
Accessories:	400 Series: Flights & Side Guards 800 Series: Scoop Flights, Flights & Side Guards

Typical Cross Section

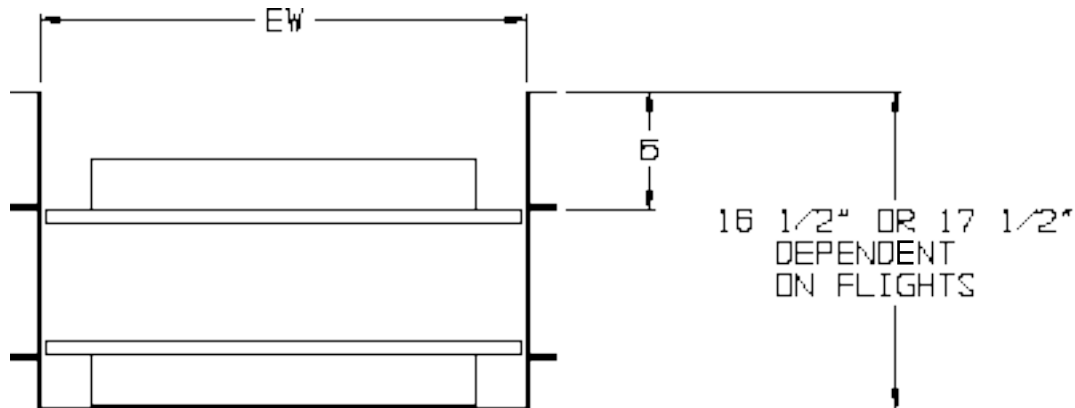

*This drawing is for dimensional reference only.
It may not accurately depict the final conveyor design.*



P.O. Box 205 • Alpena, MI 49707 • fax (989) 358-7065 • voice (800) 356-1593

Visit us on the world wide web: www.endura-veyor.com