


Noseover Conveyor Model 300

SPECIFICATIONS

Effective Widths:	4"-26" in 1" increments
Live Loads:	150 lbs. @ 45° incline 20 lbs./ft. of length (maximum)
Frame:	Formed 12 ga.
Lengths:	1'-6" - 10'-6" for inclines and upper horizontals
Curves:	30°, 45° or 60° available in 5° increments
Belt Speed:	1/4 H.P. @ 20 FPM 1/2 H.P. @ 40 FPM 3/4 H.P. @ 65 FPM 1 H.P. @ 107 FPM Other speeds available on request
Belt Types:	PVC and RMV
Standard:	Effective Widths: 4", 8", 12", 14", 20" and 26" Belt Speeds: 20, 40 and 65 FPM

Choosing stock widths enables one day ship on most replacement parts as well

Typical Cross Section

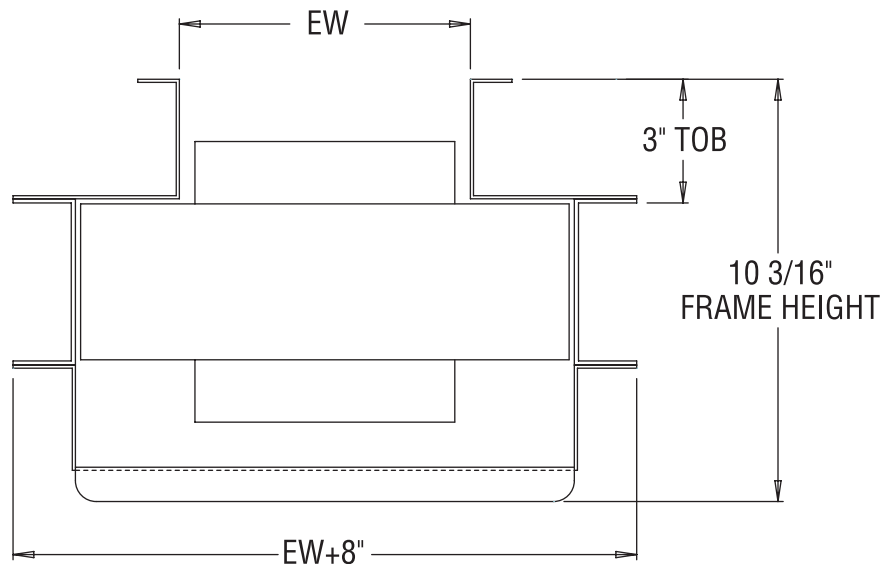

*This drawing is for dimensional reference only.
It may not accurately depict the final conveyor design.*



P.O. Box 205 • Alpena, MI 49707 • fax (989) 358-7065 • voice (800) 356-1593

Visit us on the world wide web: www.endura-veyor.com