


# Slider Bed Model 335

## SPECIFICATIONS

<b>Effective Widths:</b>	5"-31" in 1" increments
<b>Live Loads:</b>	Live Load Capacity: 20 pounds per foot of length maximum up to 175 pounds total weight.
<b>Frame:</b>	Formed 12 ga.
<b>Lengths:</b>	3 ft. to 25 ft. in 1 ft. increments
<b>Belt Speed:</b>	1/4 H.P. @ 20 FPM 1/2 H.P. @ 40 FPM 3/4 H.P. @ 65 FPM 1 H.P. @ 107 FPM Other speeds available on request
<b>Belt Types:</b>	PVC, RMV and Urethane
<b>Standard:</b>	Effective Widths: 9", 13", 17", 19", 25" and 31" Belt Speeds: 20, 40 and 65 FPM

Choosing stock widths enables one day ship on most replacement parts as well

## Typical Cross Section

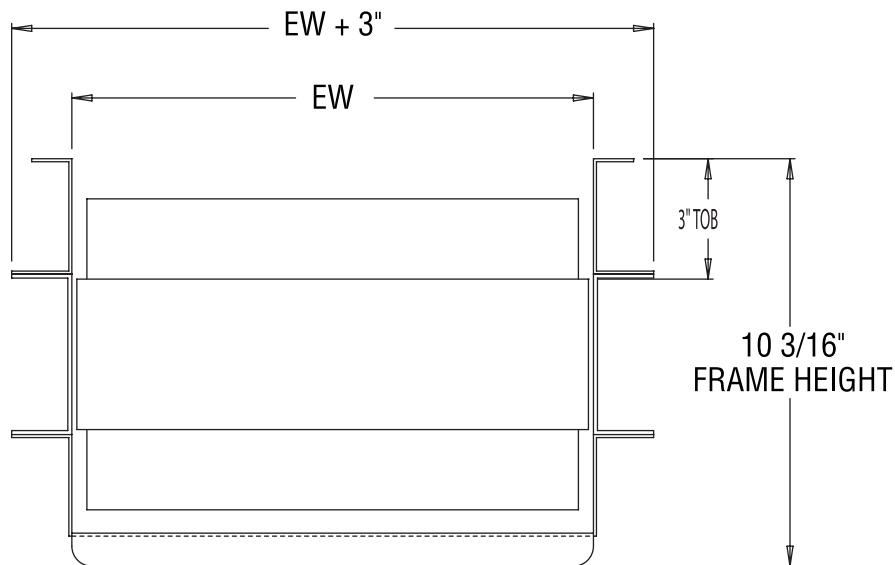

*This drawing is for dimensional reference only.  
It may not accurately depict the final conveyor design.*

