


Z-Conveyor Model 300

SPECIFICATIONS

Effective Widths:	4"-26" in 1" increments
Live Loads:	150 lbs. @ 45° incline 20 lbs./ft. of length (maximum)
Frame:	Formed 12 ga.
Lengths:	1'-6" - 10'-6" for lower and upper horizontals 1'-0" - 10'-0" for inclines
Curves:	30°, 45° or 60° available in 5° increments
Belt Speed:	1/4 H.P. @ 20 FPM 1/2 H.P. @ 40 FPM 3/4 H.P. @ 65 FPM 1 H.P. @ 107 FPM Other speeds available on request
Belt Types:	PVC, RMV and Urethane
Standard:	Effective Widths: 4", 8", 12", 14", 20" and 26" Belt Speeds: 20, 40 and 65 FPM

Choosing stock widths enables one day ship on most replacement parts as well

Typical Cross Section

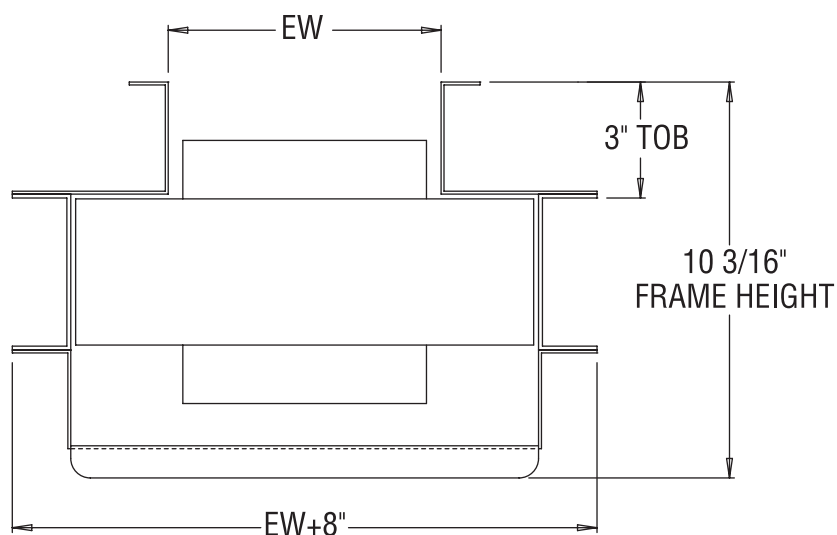

*This drawing is for dimensional reference only.
It may not accurately depict the final conveyor design.*

