


# Z-Conveyor Model 660

## SPECIFICATIONS

<b>Effective Widths:</b>	12"- 36" in 1" increments
<b>Live Loads:</b>	Up to 1000 lbs. maximum (40 lbs. per foot of length maximum)
<b>Frame:</b>	Formed 10 ga.
<b>Lengths:</b>	2'-6" - 10'-6" for lower and upper horizontals 1'-0" - 15'-0" for inclines
<b>Belt Speed:</b>	30, 40, 50, 60, 75, 100, 120, 150 and 200 FPM Other speeds available on request
<b>Horsepower:</b>	1/2, 3/4, 1, 1-1/2, 2, 3 and 5 H.P.
<b>Belt Types:</b>	PVC, RMV and Urethane
<b>Standard:</b>	Standard Speeds: 40 and 60 FPM

Choosing stock widths enables one day ship on most replacement parts as well

## Typical Cross Section

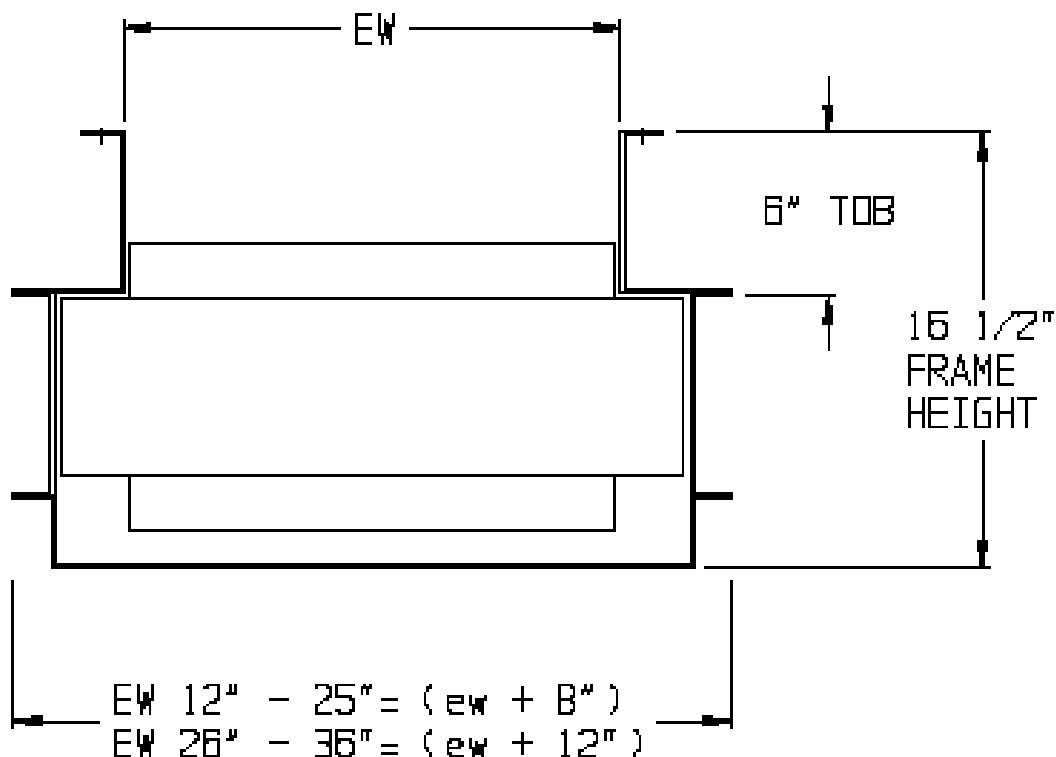

*This drawing is for dimensional reference only.  
It may not accurately depict the final conveyor design.*

