


Drag Chain Flight Conveyor

Model 1500DC

SPECIFICATIONS

Effective Widths:	6" ➡ 36" (in 1" increments)
Abrasion Resistant Bottom Pans:	3/16"
Frame:	Formed 12 GA
Lengths:	2' ➡ 15' lg. for lower and upper horizontals (in 1' increments) 1' ➡ 10' lg. for inclines (in 1' increments)
Incline Angles:	30°, 45° and 60°
Chain Size:	1-1/2" Pitch
Chain Speed:	5, 10, 20, and 30 FPM (Feet per Minute)
Horsepower:	1/2 thru 2 H.P.
Optional Features:	Infeed Guides Discharge Chutes Leg Supports Electrical Controls Multiple product discharge points Stainless steel construction Liquid tight frame

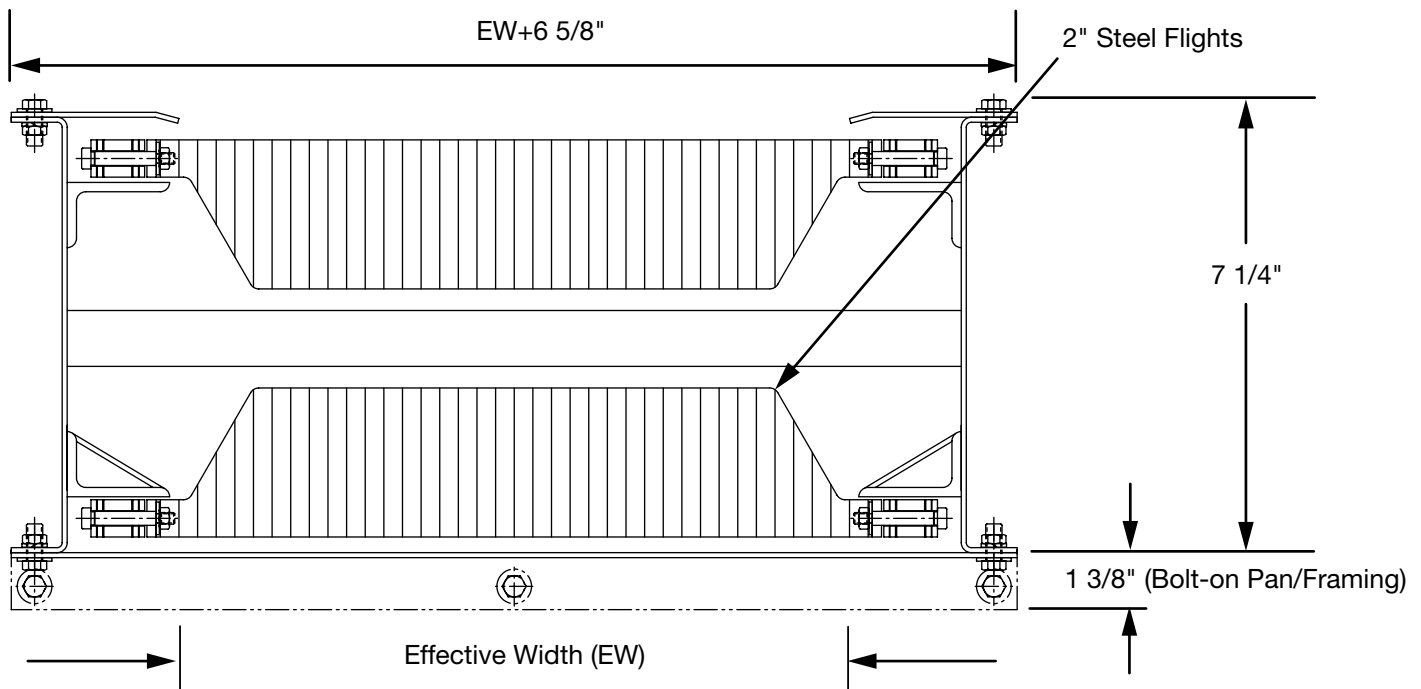

*This drawing is for dimensional reference only.
It may not accurately depict the final conveyor design.*