


# Aluminum Frame Conveyor Model 335-A

## STD. SPECIFICATIONS

<b>Std. Effective Widths:</b>	6" to 31" (in 1" increments)
<b>Live Loads:</b>	20 pounds per foot of length max. up to 175 lbs. total weight
<b>Frame:</b>	1/8" Formed Aluminum
<b>Lengths:</b>	3' to 25' long in any combination (one ft. increments)
<b>Incline Angles:</b>	30°, 45°, and 60° (also available in 5° increments upon request)
<b>Belt Types:</b>	V-Guided PVC, RMV, or Urethane
<b>Belt Speeds:</b>	20, 40, 65, and 107 FPM (feet per minute)
<b>Horsepower:</b>	1/4 H.P. thru 1 H.P.
<b>Optional Features:</b>	Infeed Hopper Discharge Chute Leg Supports Electrical Controls Side Skirts & Side Guide Material Belt Sidewall – up to 2" high Cleats – up to 2" high Trough Slider Bed (not V-Guided) Wash down rated

## TYPICAL CROSS SECTION

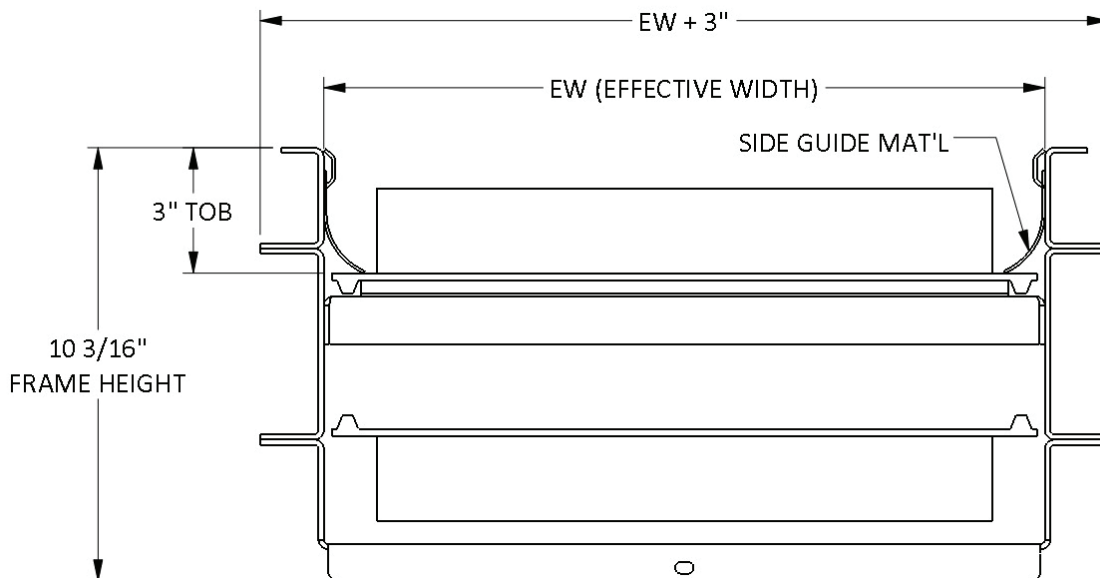

*This drawing is for dimensional reference only.  
It may not accurately depict the conveyor design.*